



SPIRAC

Solid Handling Solutions

DRUMGUARD™

CUP & DRUM SCREEN



FEATURES AND BENEFITS

- ◆ Screen large volumes of water.
- ◆ Perforated panels in steel or Ultra-high-molecular-weight polyethylene (UHMWPE).
- ◆ Cup Screens from 3ft diameter.
- ◆ Drum Screens up to 60ft diameter.
- ◆ Screening down to 2mm.
- ◆ Widths up to 13ft.
- ◆ Efficient sealing system – no carry over.

These robust screens can be used on water and sewage applications. DRUMGUARD™ is designed to automatically and reliably filter influent water and discharge recovered debris or marine life into the appropriate handling trough.

Over many years the cup screen particularly has been used on sewage works for fine screening and sea outfall use. Both drum and cup screen cylinders can be fitted with perforated stainless or Ultra-high-molecular-weight polyethylene (UHMWPE) for sewage work and woven wire normally for water intakes.


Apertures for sewage are standard down to 5mm, and 3mm is the accepted minimum for water intakes. Within the structure design, elevating trays lift the heavy debris to the discharge point in the debris hoppers normally situated at the operating floor level. Finer debris adhering to the perforated panels is washed into the debris hoppers by external sprays mounted inside the spray box.

Debris is flushed from the hoppers by the washwater into rubbish channels at operating floor level. On sewage applications, rotating brush gear can be fitted integrally in the spray box to give extra beneficial cleaning of the meshes for added efficiency.


Drum screens are designed to give the maximum hydraulic loading if required and substantial shafts are mounted in heavy duty roller bearings with sealing surfaces metal sprayed and ground to give long seal life. The cast iron racks mounted on the screen periphery engage with a high density nylon pinion again giving long, trouble free life. Most drum and cup screens can be fitted with two speed drives giving a normal operation of 3 to 5 metres/min. and a double higher loading speed.



On all screens the influent is sealed from the effluent by efficient flexible neoprene rubber seals suitably shielded against mechanical damage and running on high density plastic seal flats.

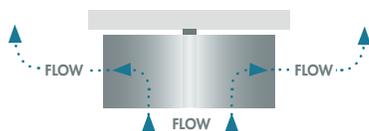

Cup Screen



Drum Screen

© SPIRAC. All rights reserved. V.I. 1, 09/2020

TALK TO US ABOUT YOUR SCREENING NEEDS.
Our wide range of screens guarantees we have the right solution for you.

AUSTRALIA
SPIRAC Pty Ltd
Western Australia (Perth)
+61 8 9434 0777
info@spirac.com.au

NETHERLANDS
SPIRAC BV
Maarheeze
+31 495 430 203
info@spirac.nl

SWEDEN
SPIRAC AB
Limhamn
+46 40 36 22 00
info@spirac.se

UNITED KINGDOM
SPIRAC Limited
Banbury
+44 1 295 270 335
info@spirac.co.uk

USA
SPIRAC (USA) Inc
Newnan GA
+1 770 632 9833
sales@spirac.com